

PCB Connector Series


KLS1-XL1-5.08 Pitch=5.08mm TYPE

Electrical Specification:


- Rated Voltage: 250V AC/DC
- Rated Current: 5A
- Contact Resistance: 0.01Ω max
- Insulation Resistance: 1000MΩ min
- Withstand voltage: 500V AC/MIN
- Temperature range for usage : -40°C~+105°C

Material:

- Housing: PA66 (PA66) UL94V-2
- Contacts: Phosphor Bronze
- Plating: Tin 50u" over 100u" nickel
- Wire range : AWG#30~#22

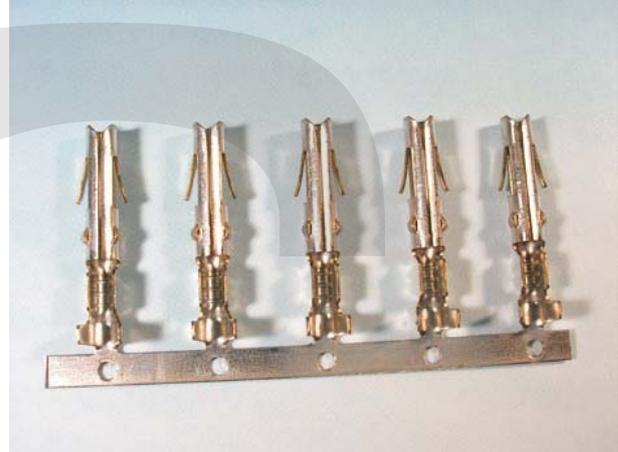

Female Terminal

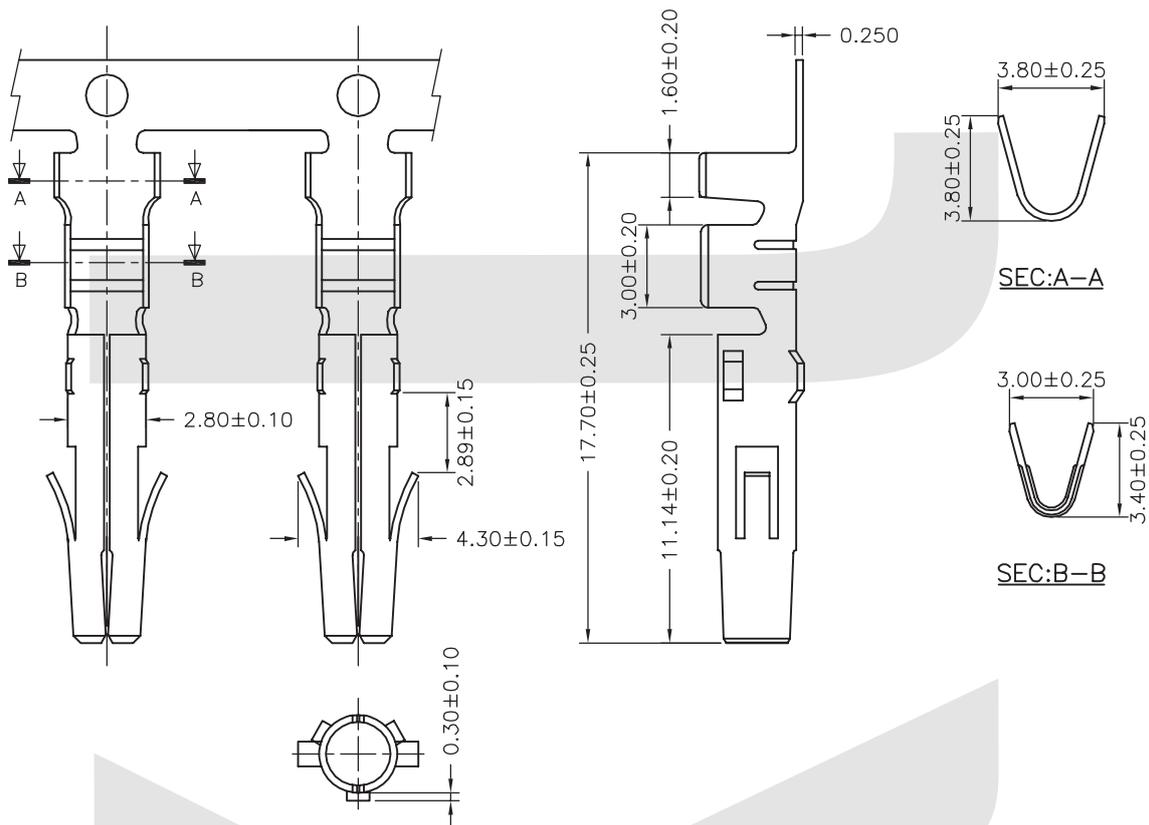

ORDER INFORMATION

Product NO.: KLS1-XL1-5.08- FT

Series No. _____
Pitch: 5.08=5.08mm _____

Type: MH=Male Housing FT=Female Terminal
 FH=Female Housing MT=Male Terminal
 S=Straight pin R=Right pin