
3.0V 10F (1030)

FEATURES

EDLC (Electric Double Layer Capacitor)

- High Power Density (Low ESR)
- Over 500,000 cycle life (semi-permanent)
- Higher energy density compared with 2.7V caps
- RoHS compliant
- Long-term reliability improved at high temperature and humidity(65℃ 90%RH)

Drawing

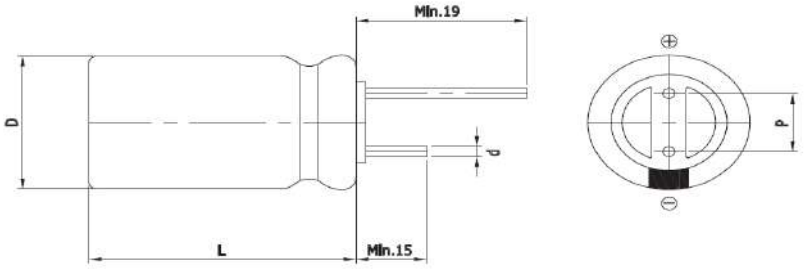

D (Φ)	10.0 +1.0 Max
L (㎜)	30.0 ±1.5
d (Φ)	0.6 ±0.1
P (㎜)	5.0 ±0.5

SPECIFICATION

ITEM		CHARACTERISTICS	
Product series		EDLC	
Rated Voltage (V_R)		3.0V	
Operating Temperature		-40 ~ +65℃	
Capacitance Tolerance		-10 ~ +30%	
High Temperature Load Life		After 1,000 hours at V_R loaded under +65℃, capacitors meet the following criteria.	
		Capacitance Change	≤ 30% of initial value
		ESR	≤ 2 times of specified value
Cycle Life Characteristics	Cycle	Over 500,000	
	ΔC	≤ 30% of initial value	
	ESR	≤ 2 times of specified value	
	Method	Cycle of Charge/discharge from V_R to $1/2V_R$	
Shelf Life		2 Years No Electrical Charge, Temperature below 70℃ (ΔC : ≤ 10% of initial value / ΔESR : ≤ 50% of specified value)	

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (㎃, 72hr)	Size (mm)
			AC(1㎑)	DC			D x L
WEC 3R0 106 QG	3.0	10	35	55	9.5	0.030	10 x 30

*** Max. Current** : 1 sec. discharge to $1/2V_R$

Vina Tech Co., Ltd. Tel : +82 63 715 3020 E-mail : hycap@vina.co.kr Web : www.vina.co.kr