




Shock and impact sensor is used for measuring, displaying and analyzing shock and impact. AW2T24TEL-4A1 shock and impact sensor has the advantage of high sensitivity, stability and reliability, can be used in most occasions where need the monitoring of impact and vibration.

Model :

AW5E40T-02E2C

Dimensions :

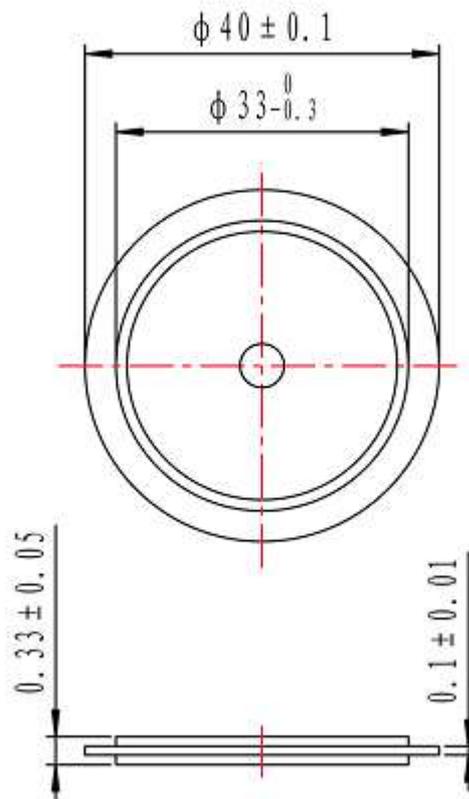

Specification :

| NO. | 项目Item | 标准Specification |
|-----|---------------------------------|--------------------|
| 1 | 谐振频率response frequency | 200±80Hz |
| 2 | 谐振阻抗resonant impedance | 605KΩ |
| 3 | 主电极电容main electrotatic capacity | 90±30% at1.0KHz/1V |
| 4 | 工作温度operating temperature | -20℃~+70℃ |
| 5 | 储存温度stotage temperature | -30℃~+80℃ |