

Shoulder 好达

SHOULDER ELECTRONICS CO., LTD.

SAW Components Data Sheet

PRODUCT 产 品: SAW RESONATOR

MODEL NO 型 号: HDR□□□M SMD-6

PREPARED 编 制:

CHECKED 审 核:


APPROVED 批 准:

DATE 日 期: 2007-01-25


1.SCOPE

This specification shall cover the characteristics of 1-port SAW resonator used for remote-control security.

2. DIMENSION

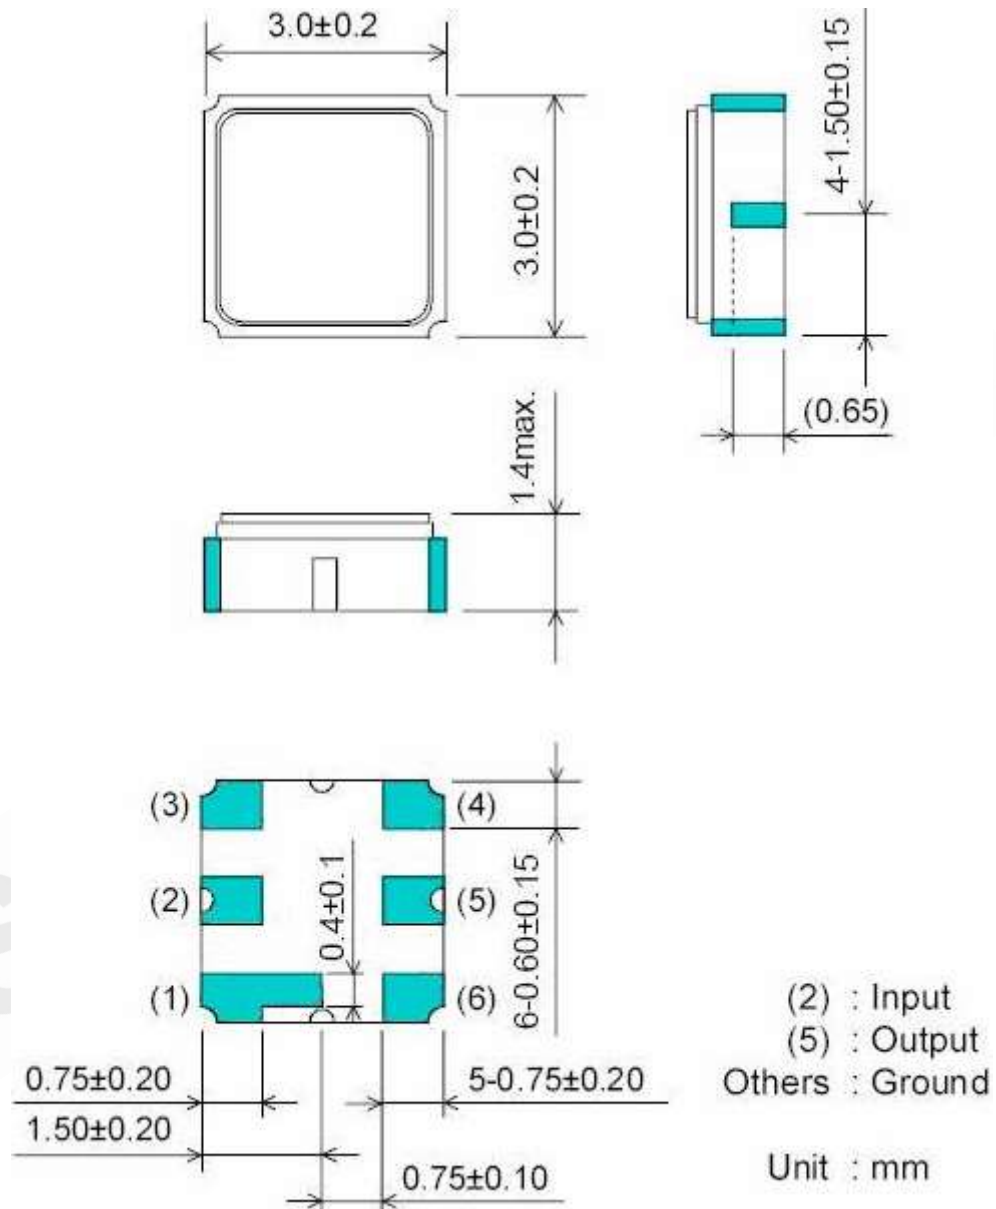

3. TEST CIRCUIT

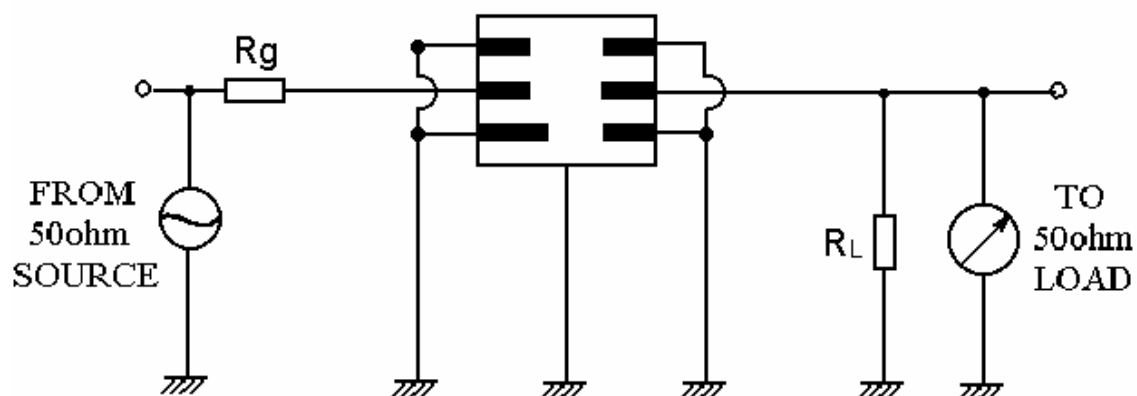

4. Electrical characteristics

Part number		min	typ	max	unit
Center Frequency		Table 1			
Insertion Loss			1.5	2.5	dB
Quality Factor Unload Q			11.000		
50 Ω Loaded Q			2.000		
Temperature Stability	Turnover Temperature		39		$^{\circ}\text{C}$
	Turnover Frequency		$f_0 \pm 2.7$		KHz
	Freq.temp.Coefficient		0.032		ppm/ $^{\circ}\text{C}^2$
Frequency Aging			$< \pm 10$		ppm/yr
DC. Insulation Resistance		1.0			M Ω
RF Equivalent RLC Model	Motional Resistance R1		10	26	Ω
	Motional Inductance L1		86		μH
	Motional Capacitance C1		1.56		pF
Shunt Static Capacitance		1.7	2.0	2.3	pF

Table 1

F ₀ (MHz)	Frequency accuracy (KHz)	F ₀ (MHz)	Frequency accuracy (KHz)
401.250	± 75	447.275	± 75
403.050	± 75	447.325	± 75
403.550	± 75	447.625	± 75
407.300	± 75	447.675	± 75
417.500	± 75	447.725	± 75
418.000	± 75	479.500	± 75
420.000	± 75	497.500	± 75
423.220	± 75	824.000	± 250
423.920	± 75	842.000	± 250
424.825	± 75	857.650	± 250
426.062	± 75	866.000	± 250
426.275	± 75	868.000	± 250
430.500	± 75	868.300	± 250
430.650	± 75	868.320	± 250
431.705	± 75	868.350	± 250
431.900	± 75	868.500	± 250
433.385	± 75	868.750	± 250
433.420	± 75	868.950	± 250
433.650	± 75	887.000	± 250
433.920	± 75	905.800	± 250
433.950	± 75	914.000	± 250
434.420	± 75	914.500	± 250
434.520	± 75	915.000	± 250
435.200	± 75	916.300	± 250
435.800	± 75	916.500	± 250
437.500	± 75	916.800	± 250
435.700	± 75	927.000	± 250