


卷之三

SPECIFICATION

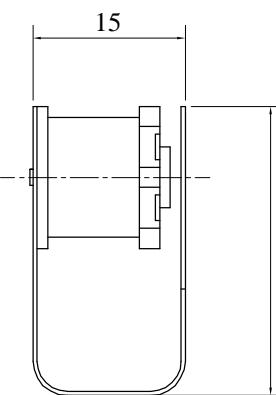

3

4

6

6

1.Rated Voltage	12VAC/50Hz
2.Operating Voltage	10.5~13.5VAC/50Hz
3.Max.Rated Current	250mA at 12VAC
4.Coil Resistance	$54.5\Omega \pm 10\%$
5.Min.Sound Pressure Level.....	75dB at 12VAC/20cm
6.Case Material	ABS
7.Operating Temperature	-20~+60°C
8.Store Temperature	-30~+70°C
9.Weight	9g

1

1

A technical drawing of a component. It features a central vertical dashed line with a circular hole at its top. To the left, there are two semi-circular cutouts. The total width of the component is indicated by a dimension line at the top labeled '21'. At the bottom, a dimension line indicates a height of '15' from the base to the bottom of the central feature.

三

四

- 1 -

四

四

KEPO NINGBO KEO ELECTRONIC CO.,LTD			
http://www.chinaacoustic.com			
Magnetic Buzzer KPMB-28012			
No.	DESCRIPTION	APPROVED	DATE
TOLERANCE/NESS X XX XXX XXXX 90° FIRST ANGLE PROJECTION	APPROVALS DRAWN CHECKED APPROVED	DATE 05.06.28	UNIT mm DWG NO. KP3.840.608 SCALE SHEET VIR 1.0
			

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
<http://www.chinacoustic.com>

דנ'ג

Magnetic Buzz
KPMB-28012

6

1

۷