

Specification for Speaker	Page	2/7
	Revision No.	1.0
Model No. : KPSP45160MF-08/0.5G-5214	Drawing No.	KFC5214

## CONTENTS

1. Scope
2. General
3. Electrical and Acoustic Characteristics.
4. Reliability Test
5. Measurement Block Diagram & Response curve
6. Dimensions
7. Revision

Specification for Speaker		Page	3/7
		Revision No.	1.0
Model No. : KPSP45160MF-08/0.5G-5214		Drawing No.	KFC5214

## 1. Scope

This specification is applied to the dynamic speaker which is used all of the electrical acoustic product.

-- compact, rich sound

-- applications: mobile phone, PDA, notebook computer, etc. ..

## 2. General

2.1 Out-Diameter : 45 mm

2.2 Height : 15.5 mm

2.3 Weight : 50 g

2.4 Operating Temperature range:

-20~+50℃ without loss of function

2.5 Store Temperature range:

-25~+55℃ without loss of function

## 3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 ℃, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Impedance	8 Ω ± 15% (1Vrms at 1KHz)
2	Sound Pressure Level	92 dB ± 3dB 0.1w/0.1m at AVG 0.8,1.0,1.2,1.5KHz
3	Resonance Frequency	650 Hz ± 20%
4	Frequency Range	Fo ~4.0KHz
5	Input Power	Rated 0.5 W / Max. 1 W
6	Distortion	10% Max. at 1kHz/2Vrms
7	Buss and Rattle	Should not be audible buzzes,rattles when the 2V sine wave signal swept at frequency range.
8	Polarity	When supplied plus D.C. voltage to (+) terminal, the cone diaphragm must move to forward.

# Specification for Speaker

Page

4/7

Revision No.

1.0


Model No. : KPSP45160MF-08/0.5G-5214

Drawing No.

KFC5214

## 4. Reliability Test

After test(1~7item), the speaker S.P.L . difference shall be within  $\pm 3\text{dB}$ , and the appearance not exist any change to be harmful to normal operation (e.g. cracks,rusts,damages and especially distortion).

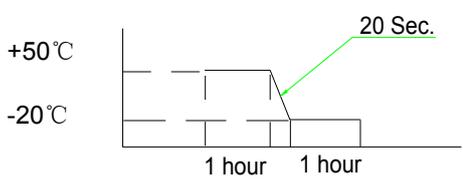No	Items	Specification
1	High Temperature Test	After being placed in a chamber with $+55\pm 3\text{ }^\circ\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
2	Low Temperature Test	After being placed in a chamber with $-25\pm 3\text{ }^\circ\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
3	Humidity Test	After being placed in a chamber with 85 to 90%R.H. at $+40\pm 2\text{ }^\circ\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
4	Thermal Shock Test	<p>After being placed in a chamber at <math>+50\text{ }^\circ\text{C}</math> for 1 hour, then speaker shall be placed in a chamber at <math>-20\text{ }^\circ\text{C}</math> for 1 hour(1 cycle is the below diagram). After 4 above cycles, speaker shall be measured after being placed in natural condition for 10 Sec..</p> 
5	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to55Hz band of vibration frequency to each of 3 perpendicular directions for 1 hour, then placed in natural condition for 1 hour, speaker shall be measured.
6	Drop Test	The speaker when mounted in the jig which weight 85g~100g, shall with stand 15 times random drops from a height of 1.5 meter to a concrete floor faced with 5mm thick hard wood board.and be nothing mechanical damage.
7	Load test	After being applied loading white noise with input power 0.5W(2Vrms.) for 96 hours, then placed in natural condition for 1 hour, speaker shall be measured.
8	Insulation test	When they are measured with DC 100V the insulation resistance between v.c. terminal and frame must be more than 1 M $\Omega$

# Specification for Speaker

Page

5/7

Model No. : KPSP45160MF-08/0.5G-5214



Revision No.

1.0

Drawing No.

KFC5214

## 5. Measurement Block Diagram & Response curve

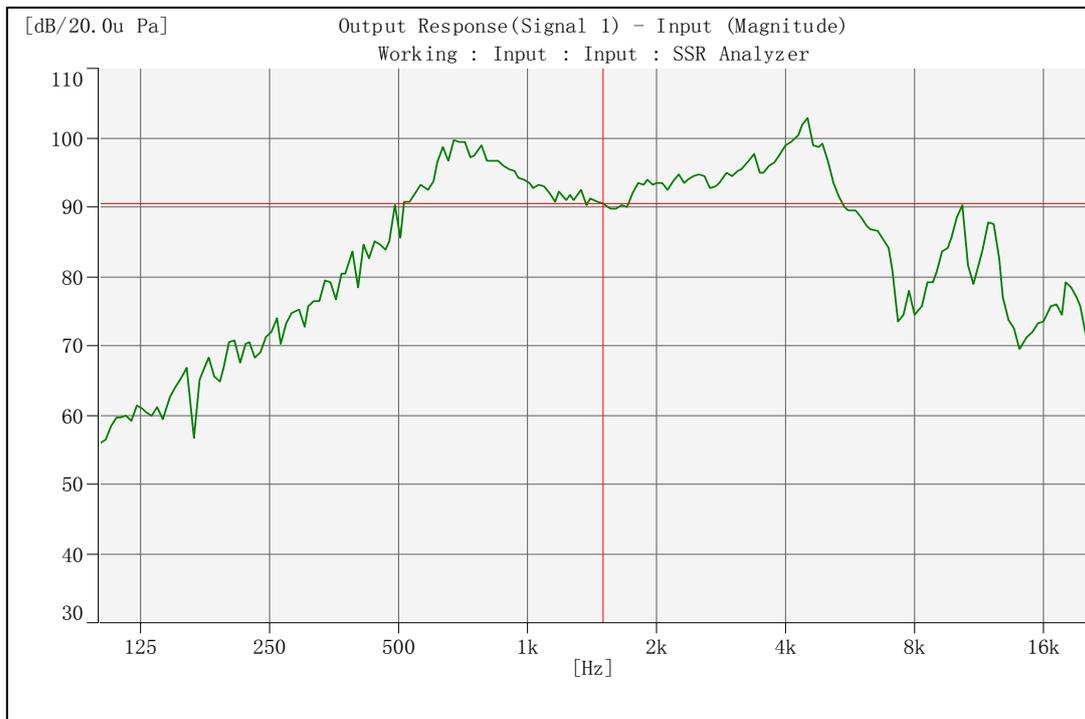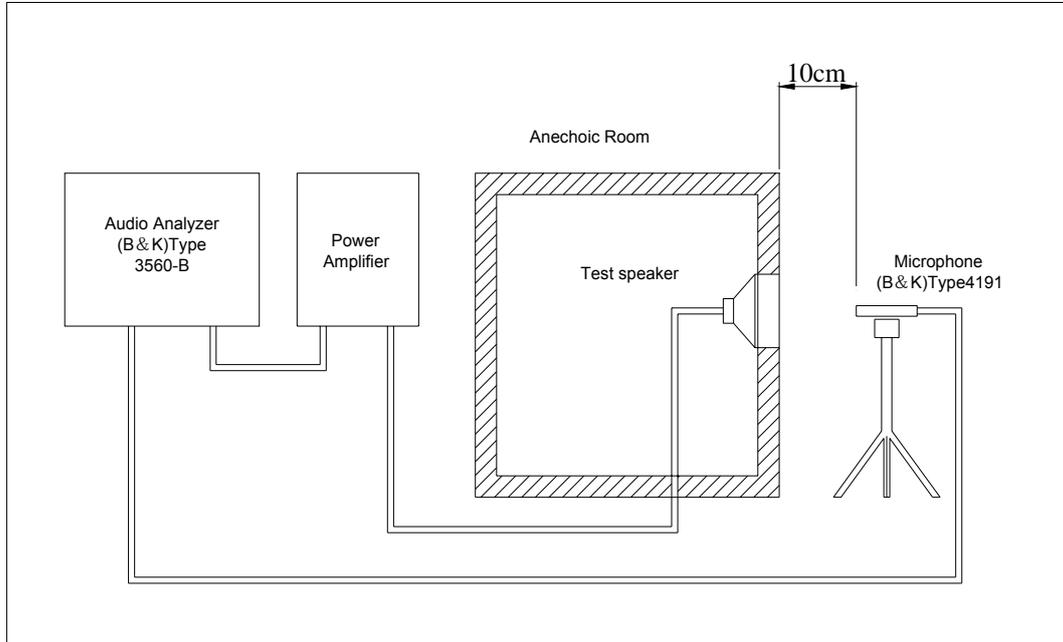

# Specification for Speaker

Page

6/7

Model No. : KPSP45160MF-08/0.5G-5214



Revision No.

1.0


Drawing No.

KFC5214

## 6. Dimensions

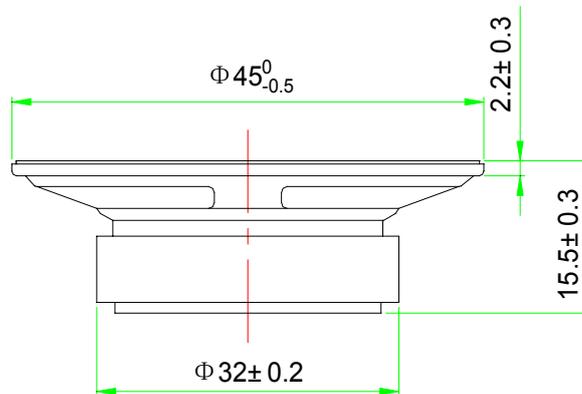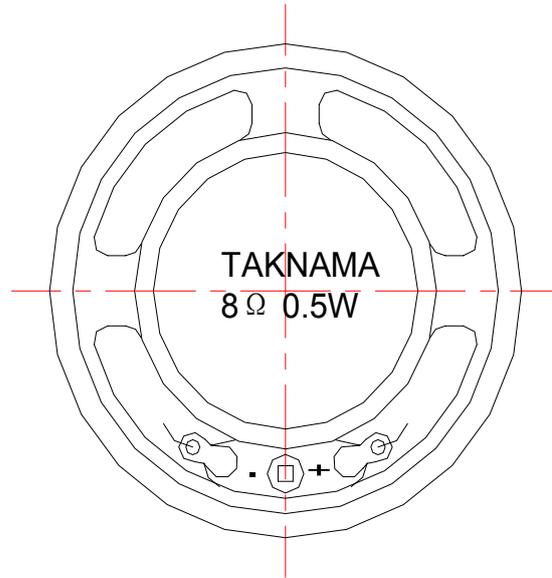

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance :  $\pm 0.2$

