

# SPECIFICATION

## FOR APPRONAL

Customer : \_\_\_\_\_

Product Name : Horn speaker  
\_\_\_\_\_

Model Name : VSH-72R8F14P15  
\_\_\_\_\_

Drawing No. : VS20221128014  
\_\_\_\_\_

### Signature of Voice

Approved by	Checkde by	Issued by	Date

 **福爱斯电子有限公司**  
VOISE ELECTRONICS CO.,LTD.

Address:No 96 Mogao Dongqian Lake Industial Area ningbo,China,  
Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121  
<http://www.nbvoise.com> Email:sales@nbvoise.com

# Specification for Horn speaker

Page

2/3

Revision No.

1.0

Model No. : VSH-72R8F14P15

Drawing No.

VS20221128014

## 2. Scope

This specification is applied to the Horn speaker used for sounder in alarm systems, Please contact us when using this product for any other applications than described in the above.

## 3. General

- 2.1 Out-Diameter : 72x72 mm  
2.2 Height : 35.5 mm  
2.3 Weight : 410 ±10g  
2.4 Operating Temperature range:  
-20~+70°C without loss of function  
2.5 Store Temperature range:  
-30~+80°C without loss of function

## 4. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 °C, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Power rating RMS	15W
2	Power rating Peak	20W
3	Min Sound pressure Level	100 dB at 1M/1W
4	Resonant Frequency	1.4kHz±10%
5	Rated Frequency Range	F0-4000Hz
6	Case Material/Color	ABS/Black
7	Voice Coil	Dia 25.4mm
8	Voice Coil Impedance	8 ohm
9	Magnet size	Dia 70x32x10CM

# Specification for Horn speaker

Page

3/3

Revision No.

1.0

Model No. : VSH-72R8F14P15




Drawing No.

VS20221128014

## 5. Dimensions



Marking:  
VSH-72R8F14P15

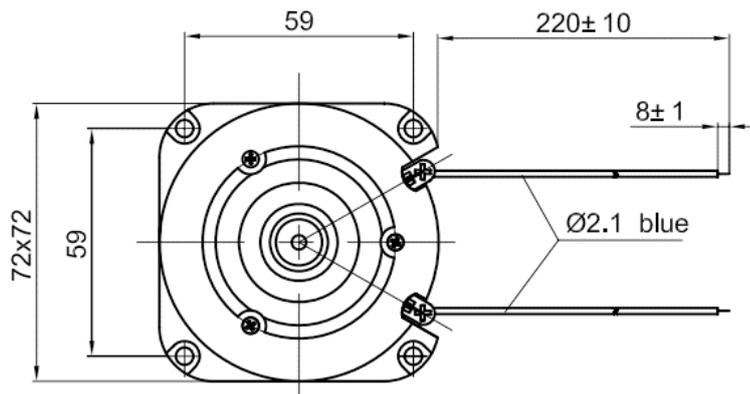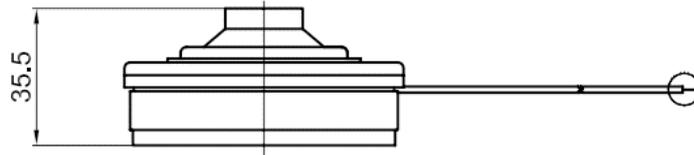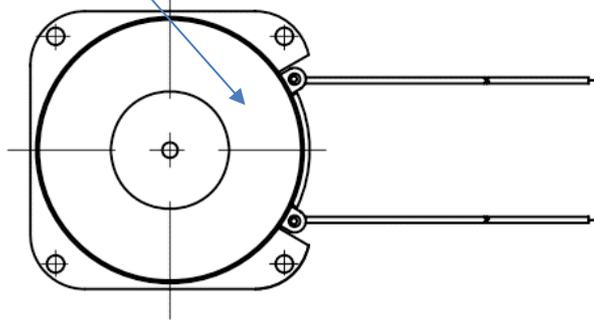

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ±1.5