




# HCF4060B

## 14-STAGE RIPPLE CARRY BINARY COUNTER/DIVIDER AND OSCILLATOR

- MEDIUM-SPEED OPERATION
- COMMON RESET
- FULLY STATIC OPERATION
- BUFFERED INPUTS AND OUTPUTS
- QUIESCENT CURRENT SPECIFIED UP TO 20V
- 5V, 10V AND 15V PARAMETRIC RATINGS
- INPUT LEAKAGE CURRENT  
 $I_I = 100\text{nA}$  (MAX) AT  $V_{DD} = 18\text{V}$   $T_A = 25^\circ\text{C}$
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC JESD13B "STANDARD SPECIFICATIONS FOR DESCRIPTION OF B SERIES CMOS DEVICES"

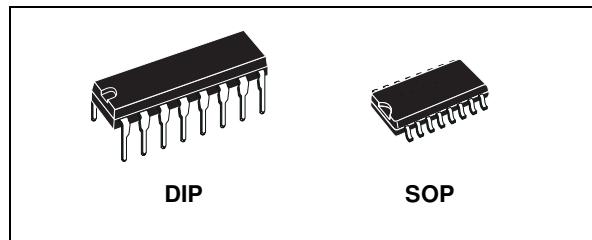

### ORDER CODES


PACKAGE	TUBE	T & R
DIP	HCF4060BEY	
SOP	HCF4060BM1	HCF4060M013TR

### DESCRIPTION

The HCF4060B is a monolithic integrated circuit fabricated in Metal Oxide Semiconductor technology available in DIP and SOP packages. The HCF4060B consists of an oscillator section and 14 ripple carry binary counter stages. The oscillator configuration allows design of either RC or crystal oscillator circuits. A RESET input is provided which reset the counter to the all 0's

state and disable oscillator. A high level on the RESET line accomplishes the reset function. All counter stages are master slave flip-flops. The state of the counter is advanced one step in binary order on the negative transition of  $\phi_1$  (and  $\phi_0$ ). All inputs and outputs are fully buffered. Schmitt trigger action on the clock pin permits unlimited clock rise and fall time.


### PIN CONNECTION

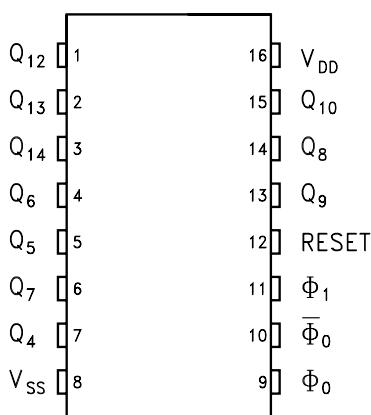

PC10810

# HCF4060B


## INPUT EQUIVALENT CIRCUIT

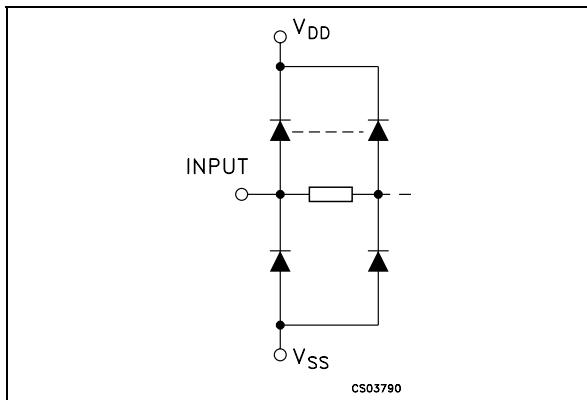


## PIN DESCRIPTION

PIN No	SYMBOL	NAME AND FUNCTION
1, 2, 3, 4, 5, 6, 7, 13, 14, 15	Q <sub>12</sub> , Q <sub>13</sub> , Q <sub>14</sub> , Q <sub>6</sub> , Q <sub>5</sub> , Q <sub>7</sub> , Q <sub>4</sub> , Q <sub>9</sub> , Q <sub>8</sub> , Q <sub>10</sub>	Outputs
9, 10, 11	Φ <sub>0</sub> , $\bar{\Phi}_0$ , Φ <sub>1</sub>	Oscillator Input
12	RESET	Reset
8	V <sub>SS</sub>	Negative Supply Voltage
16	V <sub>DD</sub>	Positive Supply Voltage

## FUNCTIONAL DIAGRAM

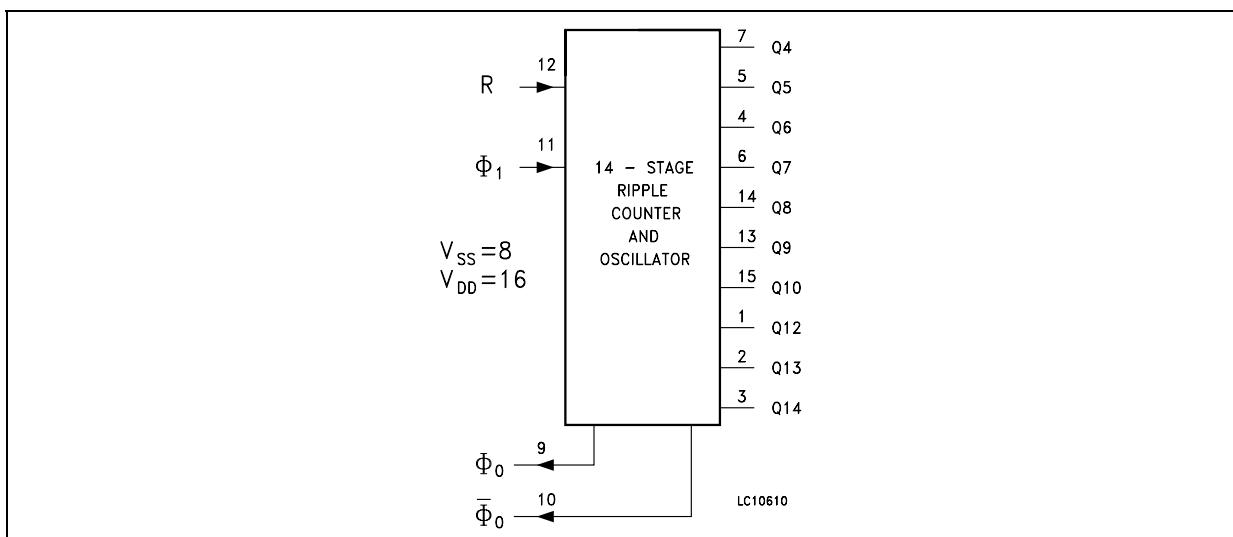

## LOGIC DIAGRAM

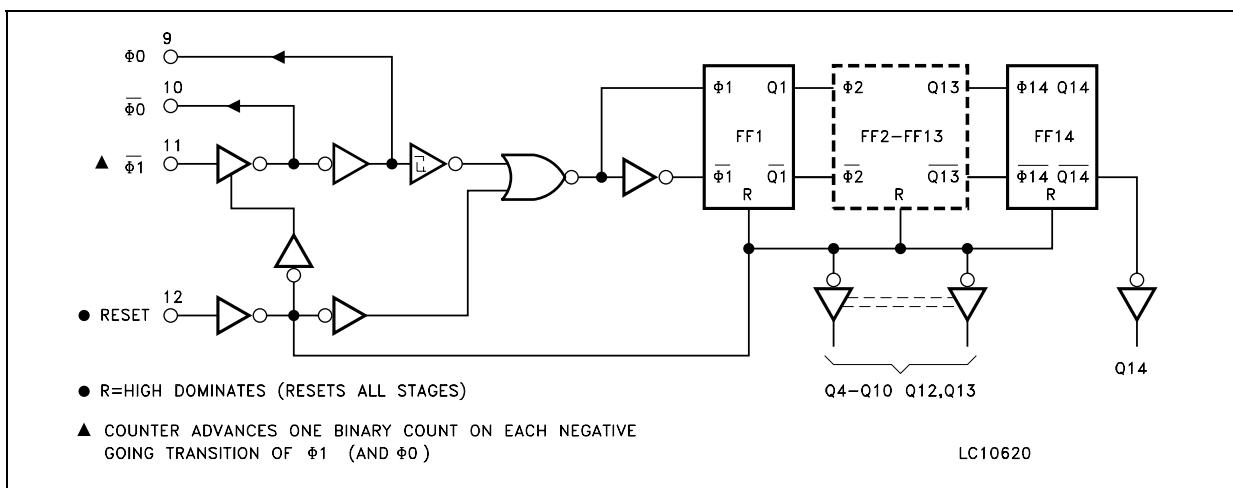

**ABSOLUTE MAXIMUM RATINGS**

<b>Symbol</b>	<b>Parameter</b>	<b>Value</b>	<b>Unit</b>
$V_{DD}$	Supply Voltage	-0.5 to +22	V
$V_I$	DC Input Voltage	-0.5 to $V_{DD} + 0.5$	V
$I_I$	DC Input Current	$\pm 10$	mA
$P_D$	Power Dissipation per Package	200	mW
	Power Dissipation per Output Transistor	100	mW
$T_{op}$	Operating Temperature	-55 to +125	°C
$T_{stg}$	Storage Temperature	-65 to +150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

All voltage values are referred to  $V_{SS}$  pin voltage.

**RECOMMENDED OPERATING CONDITIONS**

<b>Symbol</b>	<b>Parameter</b>	<b>Value</b>	<b>Unit</b>
$V_{DD}$	Supply Voltage	3 to 20	V
$V_I$	Input Voltage	0 to $V_{DD}$	V
$T_{op}$	Operating Temperature	-55 to 125	°C

# HCF4060B

---

## DC SPECIFICATIONS

Symbol	Parameter	Test Condition				Value						Unit	
		$V_I$ (V)	$V_O$ (V)	$ I_{OL} $ ( $\mu$ A)	$V_{DD}$ (V)	$T_A = 25^\circ C$			$-40 \text{ to } 85^\circ C$		$-55 \text{ to } 125^\circ C$		
						Min.	Typ.	Max.	Min.	Max.	Min.	Max.	
$I_L$	Quiescent Current	0/5			5		0.04	5		5		150	$\mu A$
		0/10			10		0.04	10		10		300	
		0/15			15		0.04	20		20		600	
		0/20			20		0.08	100		100		3000	
$V_{OH}$	High Level Output Voltage	0/5		<1	5	4.95			4.95		4.95		V
		0/10		<1	10	9.95			9.95		9.95		
		0/15		<1	15	14.95			14.95		14.95		
$V_{OL}$	Low Level Output Voltage	5/0		<1	5		0.05			0.05		0.05	V
		10/0		<1	10		0.05			0.05		0.05	
		15/0		<1	15		0.05			0.05		0.05	
$V_{IH}$	High Level Input Voltage		0.5/4.5	<1	5	3.5			3.5		3.5		V
			1/9	<1	10	7			7		7		
			1.5/13.5	<1	15	11			11		11		
$V_{IL}$	Low Level Input Voltage		4.5/0.5	<1	5			1.5		1.5		1.5	V
			9/1	<1	10			3		3		3	
			13.5/1.5	<1	15			4		4		4	
$I_{OH}$	Output Drive Current	0/5	2.5	<1	5	-1.36	-3.2		-1.15		-1.1		mA
		0/5	4.6	<1	5	-0.44	-1		-0.36		-0.36		
		0/10	9.5	<1	10	-1.1	-2.6		-0.9		-0.9		
		0/15	13.5	<1	15	-3.0	-6.8		-2.4		-2.4		
$I_{OL}$	Output Sink Current	0/5	0.4	<1	5	0.44	1		0.36		0.36		mA
		0/10	0.5	<1	10	1.1	2.6		0.9		0.9		
		0/15	1.5	<1	15	3.0	6.8		2.4		2.4		
$I_I$	Input Leakage Current	0/18	Any Input	18			$\pm 10^{-5}$	$\pm 0.3$		$\pm 0.3$		$\pm 1$	$\mu A$
$C_I$	Input Capacitance		Any Input				5	7.5					pF

The Noise Margin for both "1" and "0" level is: 1V min. with  $V_{DD}=5V$ , 2V min. with  $V_{DD}=10V$ , 2.5V min. with  $V_{DD}=15V$

**DYNAMIC ELECTRICAL CHARACTERISTICS** ( $T_{amb} = 25^\circ C$ ,  $C_L = 50pF$ ,  $R_L = 200K\Omega$ ,  $t_r = t_f = 20$  ns)


Symbol	Parameter	Test Condition		Value (*)			Unit	
		$V_{DD}$ (V)		Min.	Typ.	Max.		
$t_{TLH}$ $t_{THL}$	Output Transition Time	5			100	200	ns	
		10			50	100		
		15			40	80		
$t_{PLH}$ $t_{PHL}$	Propagation Delay Time ( $\phi$ to $Q_4$ out)	5			370	740	ns	
		10			150	300		
		15			100	200		
$t_{PLH}$ $t_{PHL}$	Propagation Delay Time ( $Q_n$ to $Q_{n+1}$ )	5			100	200	ns	
		10			50	100		
		15			40	80		
$t_W$	Input Pulse Width	5	$f = 100$ KHz		50	100	ns	
		10			20	40		
		15			15	30		
$t_r$ $t_f$	Input Pulse Rise and Fall Time	5		Unlimited			$\mu$ s	
		10		Unlimited				
		15		Unlimited				
$f_{max}$	Maximum Clock Input Frequency	5		3.5	7		MHz	
		10		8	16			
		15		12	24			
<b>RESET OPERATION</b>								
$t_{PHL}$	Propagation Delay Time	5			180	360	ns	
		10			80	160		
		15			50	100		
$t_W$	Input Pulse Width	5			60	120	ns	
		10			30	60		
		15			20	40		
<b>RC OPERATION</b>								
	Variation of Frequency (Unit-to-Unit)	5	$C_X = 200pF$ , $R_S = 560K\Omega$ , $R_X = 50K\Omega$	18	21.5	25	KHz	
		10		20	23	26		
		15		21.1	24	27		
	Variation of Frequency With Voltage Change (Same Unit)	5 to 10	$C_X = 200pF$ , $R_S = 560K\Omega$ , $R_X = 50K\Omega$			2	KHz	
		10 to 15				1		
$R_X$		5	$C_X = 10\mu F$			20	$M\Omega$	
		10				20		
		15				10		
$C_X$		5	$R_X = 500K\Omega$			1000	$\mu F$	
		10				50		
		15				50		
	Maximum Oscillator Frequency (**)	10	$R_X = 5K\Omega$ , $C_X = 15pF$	530	650	810	KHz	
		15		690	800	940		

(\*) Typical temperature coefficient for all  $V_{DD}$  values is  $0.3\%/^\circ C$ , all input rise and fall times= 20 ns.(\*\*) RC Oscillator applications are not recommended at supply voltages below 7V for  $R_X < 50K\Omega$


## HCF4060B

---


### DETAIL OF TYPICAL FLIP-FLOP STAGE

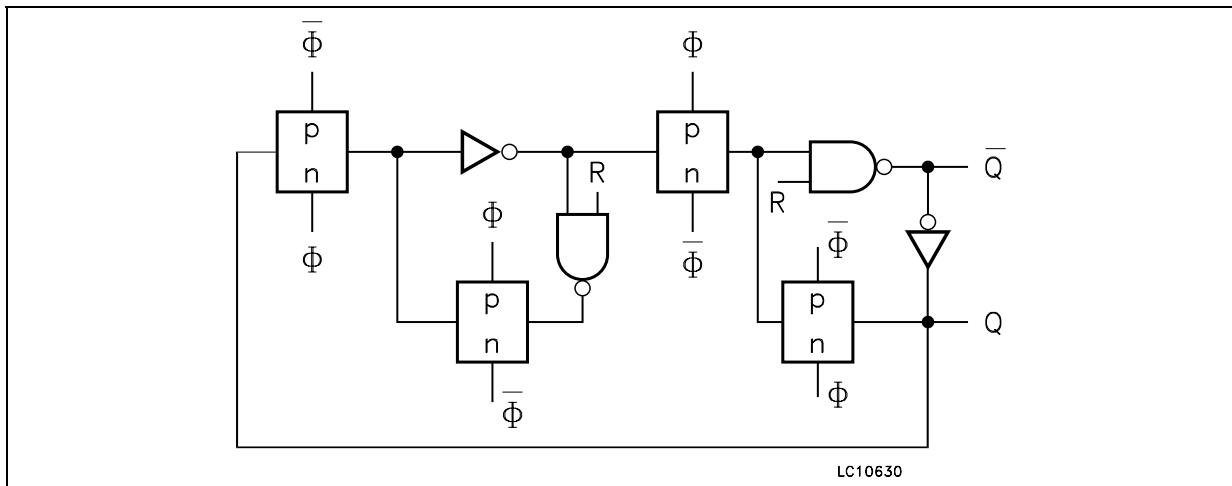

### TYPICAL RC OSCILLATOR CIRCUIT

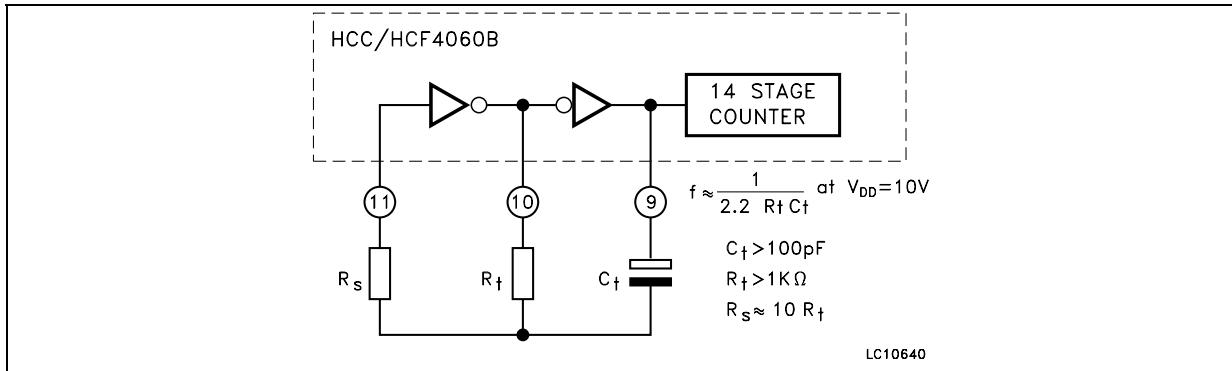


### TYPICAL CRYSTAL OSCILLATOR CIRCUIT

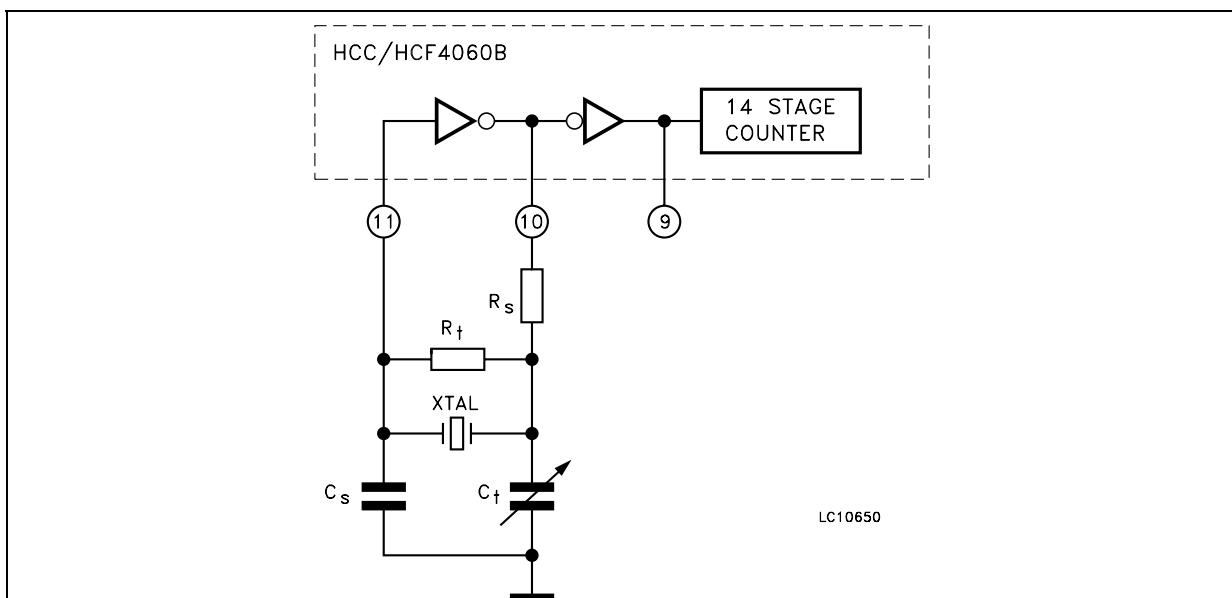

### Plastic DIP-16 (0.25) MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.51			0.020		
B	0.77		1.65	0.030		0.065
b		0.5			0.020	
b1		0.25			0.010	
D			20			0.787
E		8.5			0.335	
e		2.54			0.100	
e3		17.78			0.700	
F			7.1			0.280
I			5.1			0.201
L		3.3			0.130	
Z			1.27			0.050

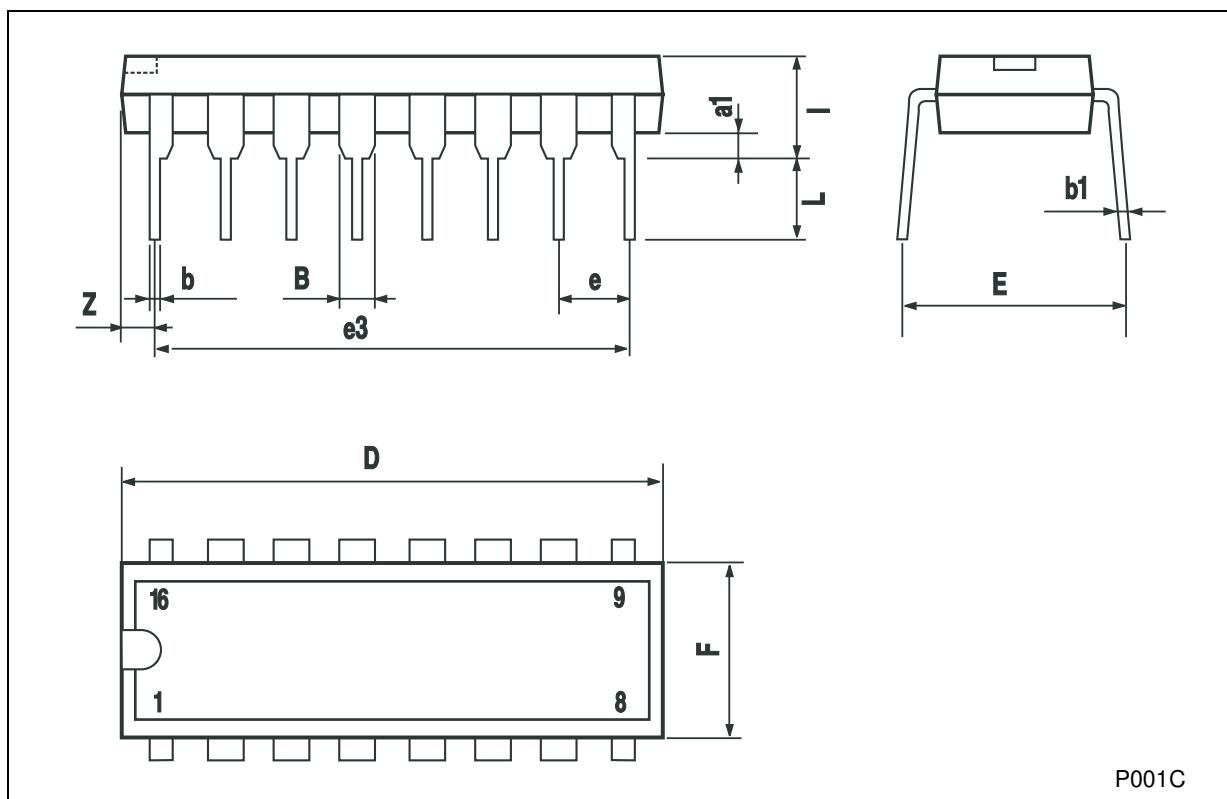

P001C

**SO-16 MECHANICAL DATA**


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.75			0.068
a1	0.1		0.2	0.004		0.008
a2			1.65			0.064
b	0.35		0.46	0.013		0.018
b1	0.19		0.25	0.007		0.010
C		0.5			0.019	
c1	45° (typ.)					
D	9.8		10	0.385		0.393
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		8.89			0.350	
F	3.8		4.0	0.149		0.157
G	4.6		5.3	0.181		0.208
L	0.5		1.27	0.019		0.050
M			0.62			0.024
S	8	° (max.)				

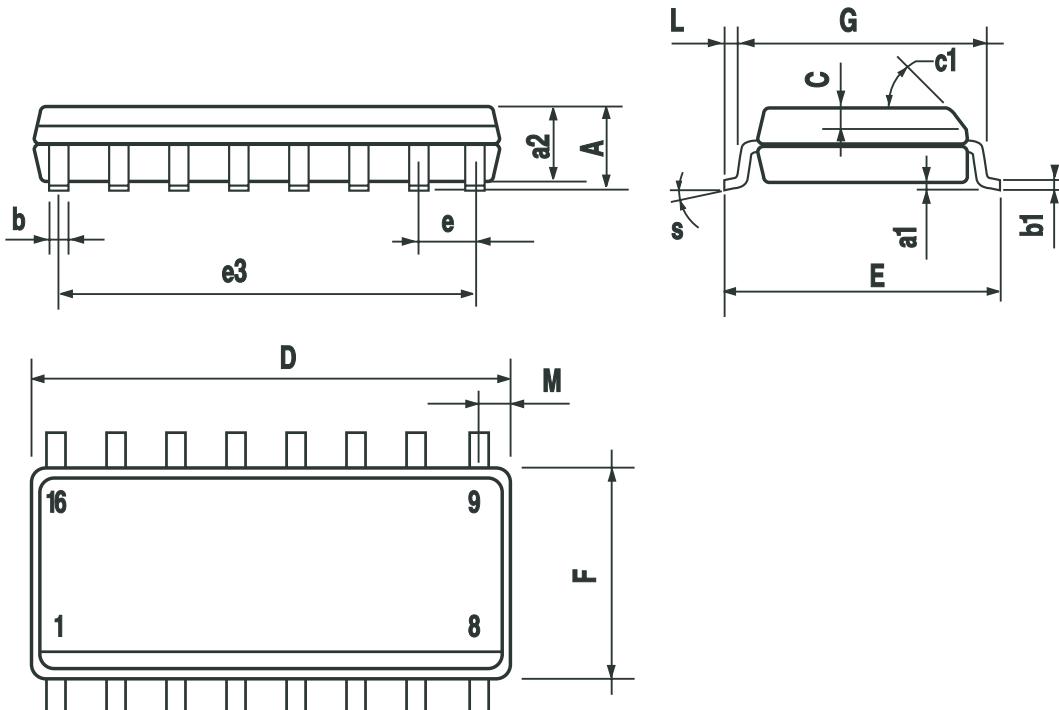

PO13H

### Tape & Reel SO-16 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			22.4			0.882
Ao	6.45		6.65	0.254		0.262
Bo	10.3		10.5	0.406		0.414
Ko	2.1		2.3	0.082		0.090
Po	3.9		4.1	0.153		0.161
P	7.9		8.1	0.311		0.319

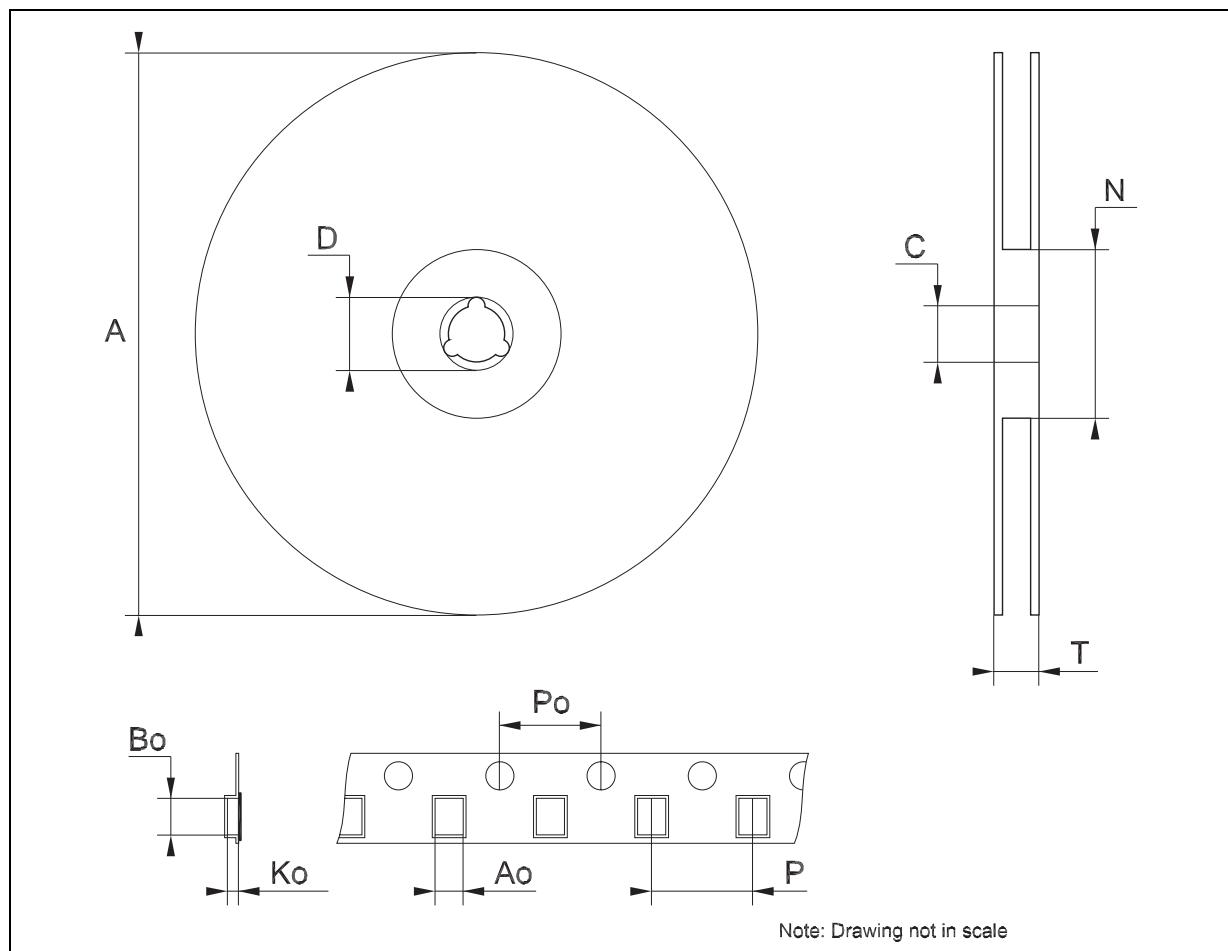

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>